



COOKE BROTHERS

High Performance
Ironmongery

Shrouded Bearing Hinges



Loadmaster



Dual Bearing



Concealed Bearing



Slimline



Shrouded Bearing



Washed Knuckle



Plain Knuckle

Shrouded Bearing Hinges

Shrouded Bearing Hinge Range


Technical Specification




Code 7200 SB Range

- ☐ Shrouded bearing design
- ☐ Available in mild steel and stainless steel
- ☐ 3 hinge widths available
- ☐ Integrated high performance bearings
- ☐ Maintenance free low friction design
- ☐ Tested to EN1935 : 2002 Grade 12
- ☐ Certifire approved
- ☐ Holes countersunk to suit No 10 w/screws, M5 m/c screws
- ☐ Full range of options and finishes available
- ☐ 25 year guarantee


Fixed Pin

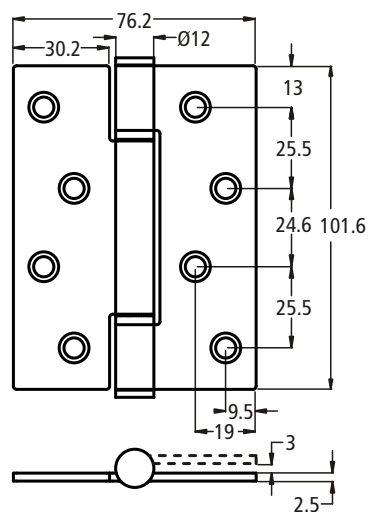


Also available in
hinge widths
88.9mm & 101.6mm



Lift-Off*

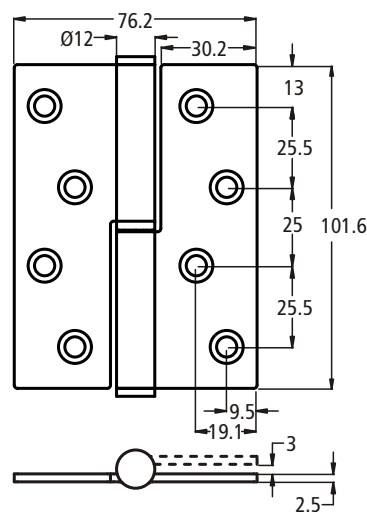

Also available in
hinge widths
88.9mm & 101.6mm




*anti-clockwise closing shown

The Phoenix 7200 Shrouded Bearing (SB) Range utilizes advanced polymer bushes to provide a totally maintenance free, low friction hinge.


Available in 3 hinge widths in both fixed pin and lift-off variants. The 7200 SB series offers the specifier an extensive range of options to suit every door application.

All hinge options have been tested to EN1935 : 2002 and are Certifire approved and come with a 25 year guarantee.


Further options:




ANSI hole pattern




Radiused corners



Dog bolt



Conductor hinge



Anti-ligature hinge