



Stainless Steel Grade 201

- Grade 201 stainless steel levers
- **8mm Concealed Push-on Round Rose**
- Suitable for Fire Doors
- 10 Year Mechanical Guarantee
- Suitable for Residential and Commercial use




















Stainless Steel Levers - Push on Rose

- Grade 201 levers (supplied with a brass plug)
- 8mm concealed, zinc plated inner roses
- Fire door rated



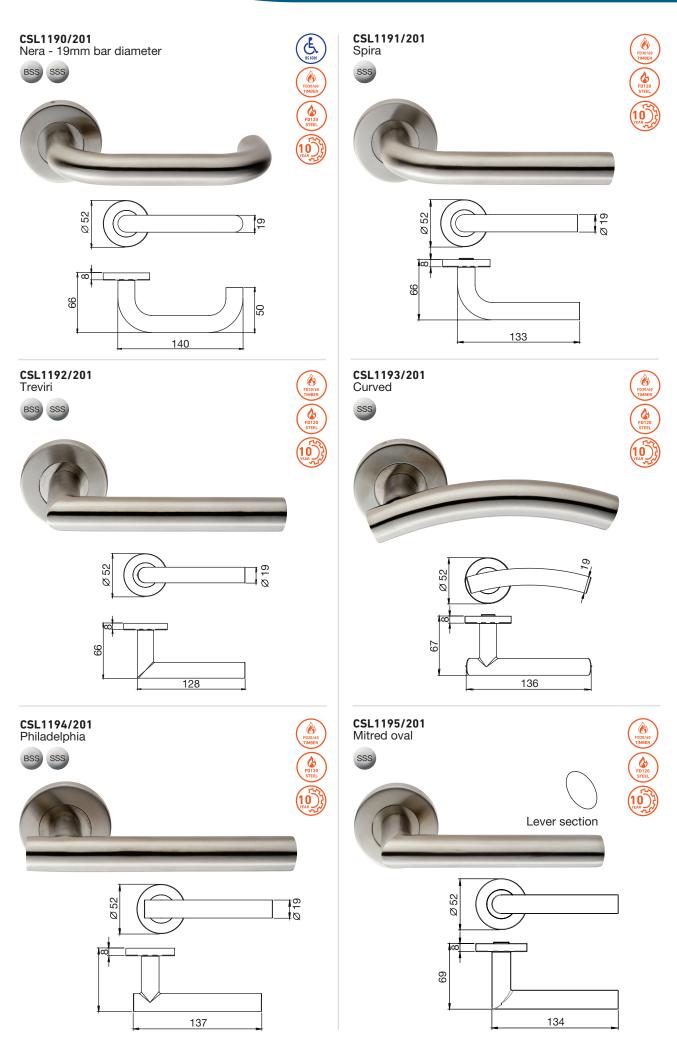


CSE1005

Euro escutcheon










CSP1005 Lock escutcheon










CSU1005 Oval escutcheon










CST1015 Thumbturn & release with indicator

c/w spare non indicator rose










CST1025 Thumbturn & release with indicator

c/w spare non indicator rose





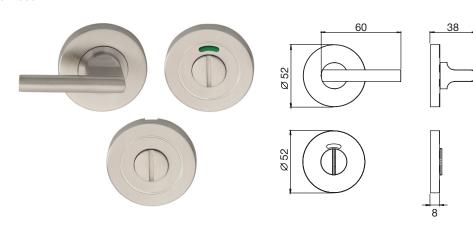





SCHOOL BUILDING PROJECTS!

New guidelines for school building projects are here. Our Carlisle Brass Specification team, with over 100 years of ironmongery experience, is ready to help you navigate these changes.



WE OFFER EXPERT ADVICE ON:

- ✓ Kickplates
- Locks
- ✓ Door Closers
- ✓ Pull Handles
- **✓** Push Plates
- ✓ Finger Guards






Contact us on: specification@carlislebrass.com 01254 274176

CST1025H-SSS









Meets latest technical design brief as laid out in DfE (Eng/Wales) School Output Specification/Nov 2022.

Relevant paragraph from Dept of Ed Tech Annex Nov 22

2.6.4. Internal Door Hardware b) 5.2.3c Emergency release locks shall be provided for toilet cubicle doors.


c) 5.2.3c The emergency release function on locks shall be designed to limit operation to members of staff only (ie Hex or Star Key operable, not coin release).

Applies to all new-build and refurbishment

Also:

Non residential toilets Publicly accessible toilets Care home - health specification Hospitality

Anywhere where it is preferrable that toilets and bathrooms are accessible via a responsible staff or key holder rather than a standard coin release.



- Long hex key on key ring supplied as standard in pack
- Secure depth hex socket on indicator release to minimise the risk of slippage when used in an emergency situation
- Suitable for doors up to 48mm as standard
- Compatible with SP85, M5 x 50mm spare spindle extension piece







CST disabled thumbturn & hex release : CST1025H-SSS Nera - 19mm bar diameter : CSL1190/201SSS

Stainless Steel Levers on Backplate

- 10-year mechanical guarantee
- Suitable for domestic and commercial use
- Manufactured using Grade 201 stainless steel
- Fire rated FD30/60 timber & FD120 steel
- Pair with our CSL to match lever designs throughout the project



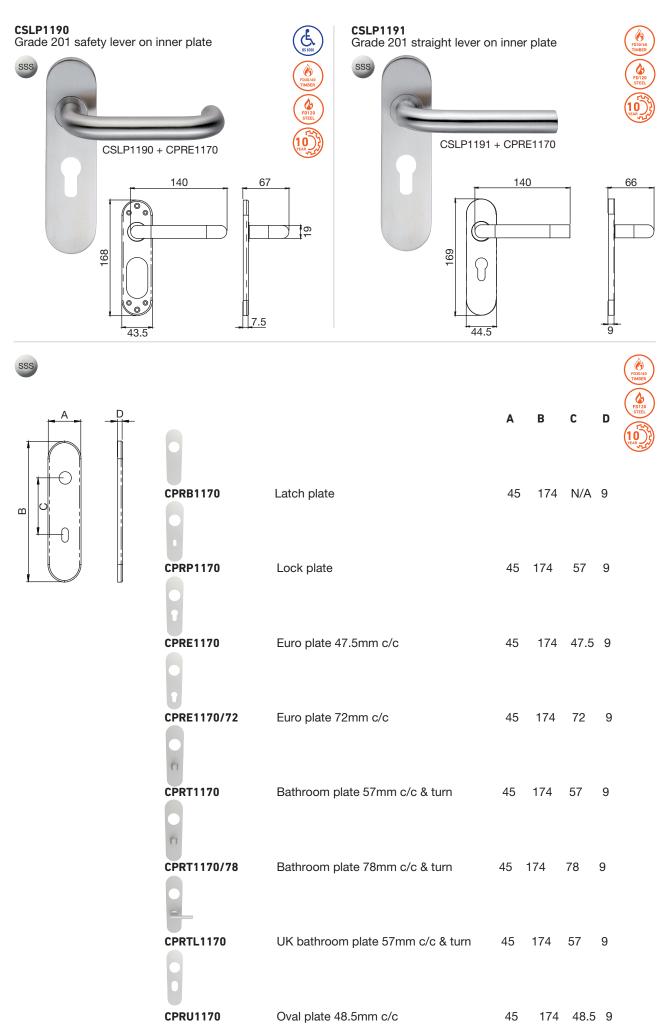

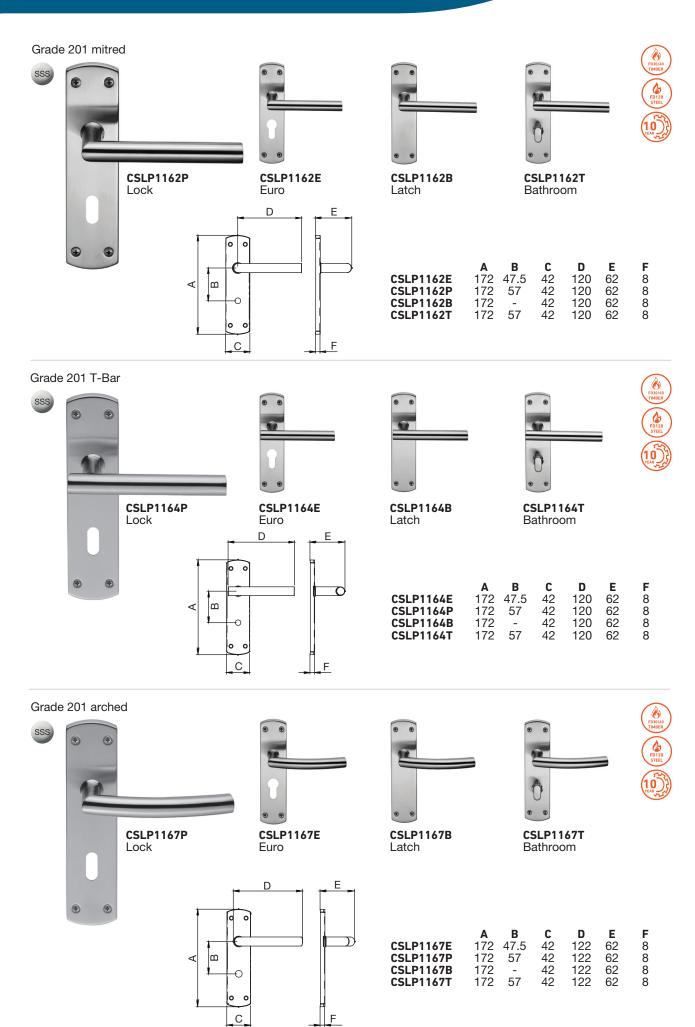






C D Grade 201 D pull handle В CSD1150 CSD1225 CSD1300 CSD1425 CSD1450 CSD1600 В CFD1150 CFD1225 D CFD1300 CFD1450 CFD1600

Back to back fixings kit BBF1019, BBF1022 to suit

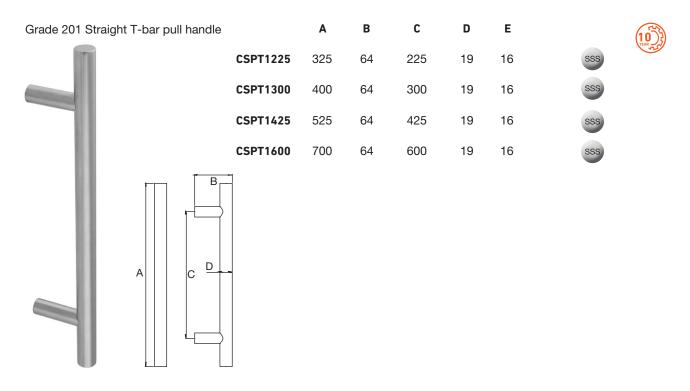


Back to back fixings kit BBF1016 to suit






Plain finger plate








500 90

1.5

* FPP1500/90

Kickplate






	Α	В	С	
KPP1590	150	590	1.2	SSS
KPP1615	150	615	1.2	SSS
KPP1650	150	650	1.2	SSS
KPP1675	150	675	1.2	SSS
KPP1690	150	690	1.2	SSS
KPP1715	150	715	1.2	SSS
KPP1725	150	725	1.2	SSS
KPP1750	150	750	1.2	SSS
KPP1790	150	790	1.2	SSS
KPP1805	150	805	1.2	SSS
KPP1815	150	815	1.2	SSS
KPP1830	150	830	1.2	SSS
KPP1855	150	855	1.2	SSS
KPP1880	150	880	1.2	SSS
KPP1890	150	890	1.2	SSS
KPP1905	150	905	1.2	SSS
KPP1915	150	915	1.2	SSS





^{*} New spec for school projects

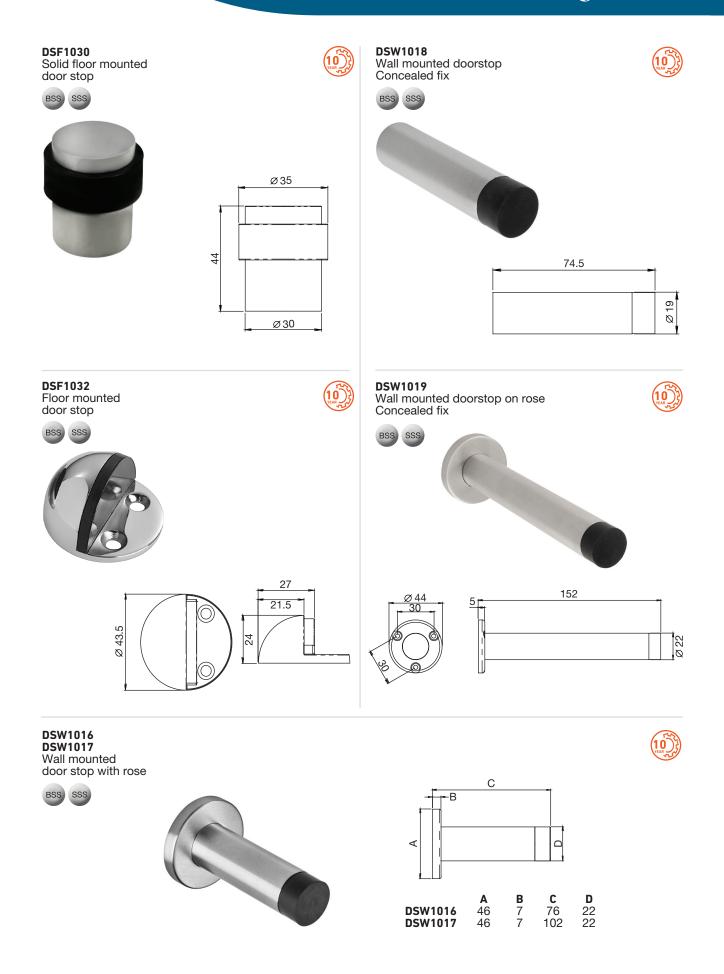

Signage



SEX1011 Male







SEX1014 Shower





SEX1016 Fire door keep shut








SEX1018 Unisex





SEX1021 Fire escape keep clear







SEX1012 Female







SEX1015 Fire door keep locked







SEX1017 Disabled







SEX1019 Baby change





SEX1022 Automatic fire door











ECP1000

Euro cylinder pull











Key to Symbols

GUARANTEES



10 Year Mechanical



FIRE SAFETY

FD30/60 TIMBER 30/60 minute fire doors



FD30/60/120 TIMBER 30/60/120 minute fire doors



FD120 STEEL 120 minute fire doors



BS 8300-2:2018 Design of an accessible and inclusive built environment. Part 2: Buildings - code of practice, is a guidance document to support building regulations document "Approved Document M. Public buildings (England & Wales) need to comply with the regulations, therefore, "All Inclusive" door hardware will need to meet, where possible, the guidelines of BS 8300-2. (These guidelines relate to, clear opening widths, Threshold heights, Door opening forces, Handle heights & dimensions, Lock case dimensions, and Light Reflectance Values (LRVs)).

Key to Finishes



BSS Bright Stainless Steel



SSS Satin Stainless Steel



© CARLISLE BRASS

Carlisle Brass Ltd, Parkhouse Road, Carlisle, Cumbria, CA3 0JU

enquiries@carlislebrass.com I Sales: 01228 511030 I Reception: 01228 511770 I Company Registration Number: 2022858 carlislebrass.com



Part of ASSA ABLOY

