


CI/SfB			
	31/59	Xt 7	
September 2007			



D&E 18407 narrow stile lockcase

CI/SfB		
31/59	Xt 7	
September 2007		

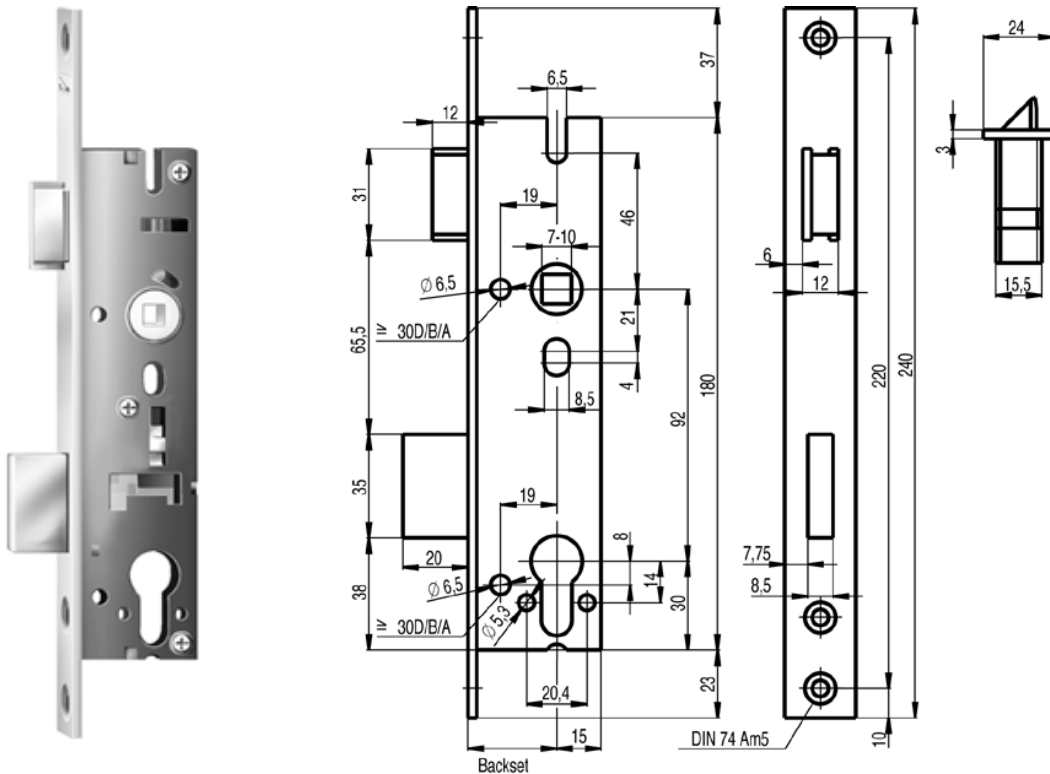

Heavy duty narrow stile reversible lockcase to suit euro profile cylinders.

DE18407WO/30/216	sashlock - 30mm backset - sqfe	sat. stainless steel
DE18407WO/30/235	sashlock - 30mm backset - sqfe	zinc plated
DE18407WO/35/216	sashlock - 35mm backset - sqfe	sat. stainless steel
DE18407WO/35/235	sashlock - 35mm backset - sqfe	zinc plated
DE18407WO/40/216	sashlock - 40mm backset - sqfe	sat. stainless steel
DE18407WO/40/235	sashlock - 40mm backset - sqfe	zinc plated
DE18407WO/45/216	sashlock - 45mm backset - sqfe	sat. stainless steel
DE18407WO/45/235	sashlock - 45mm backset - sqfe	zinc plated

Case: galvanised


Backset: 25 / 27 / **30** / 33 / **35** / 38 / **40** / 45mm
(backsets shown in bold are standard stock lines - other backsets are available to special order)

Centres: profile cylinder: 92mm

Deadbolt: 20mm single throw, cast steel - nickel plated

Follower: 8mm heavy sprung to suit unsprung door furniture

Latchbolt: reversible, cast steel - nickel plated

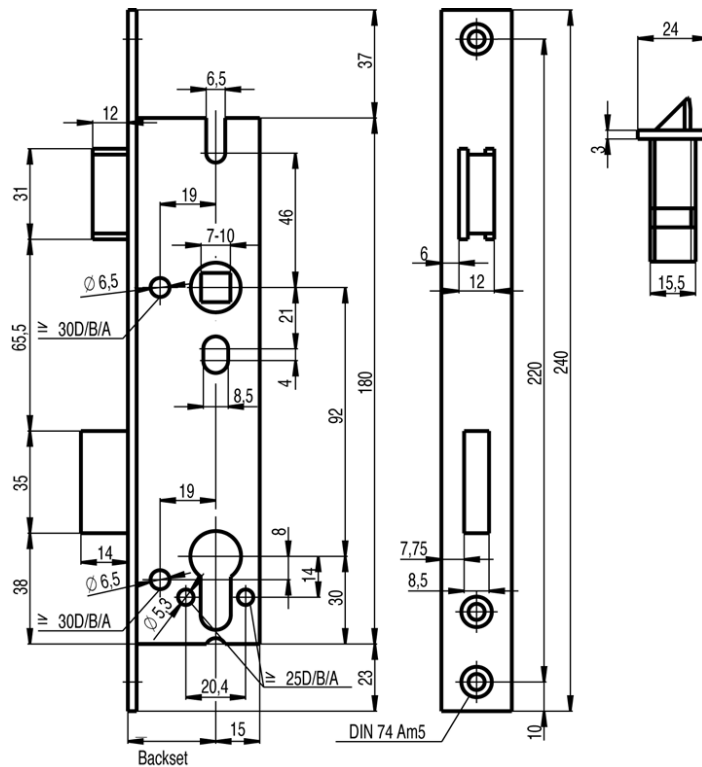

Heavy duty narrow stile reversible lockcase to suit euro profile cylinders.

DE18405WO/20/216	sashlock - 20mm backset - sqfe	sat. stainless steel
DE18405WO/20/235	sashlock - 20mm backset - sqfe	zinc plated
DE18405WO/25/216	sashlock - 25mm backset - sqfe	sat. stainless steel
DE18405WO/25/235	sashlock - 25mm backset - sqfe	zinc plated
DE18405WO/27/216	sashlock - 27mm backset - sqfe	sat. stainless steel
DE18405WO/27/235	sashlock - 27mm backset - sqfe	zinc plated
DE18405WO/30/216	sashlock - 30mm backset - sqfe	sat. stainless steel
DE18405WO/30/235	sashlock - 30mm backset - sqfe	zinc plated
DE18405WO/35/216	sashlock - 35mm backset - sqfe	sat. stainless steel
DE18405WO/35/235	sashlock - 35mm backset - sqfe	zinc plated
DE18405WO/40/216	sashlock - 40mm backset - sqfe	sat. stainless steel
DE18405WO/40/235	sashlock - 40mm backset - sqfe	zinc plated
DE18405WO/45/216	sashlock - 45mm backset - sqfe	sat. stainless steel
DE18405WO/45/235	sashlock - 45mm backset - sqfe	zinc plated

Case: galvanised

Backset: 18 / **20** / 22 / **25** / 27 / **30** / 33 / **35** / 38 / **40** / **45mm**
(backsets shown in bold are standard stock lines - other backsets are available to special order)

Centres: profile cylinder: 92mm


Deadbolt: 14mm single throw, cast steel - nickel plated

Follower: 8mm heavy sprung to suit unsprung door furniture

Latchbolt: reversible, cast steel - nickel plated.

D&E 18405 EP narrow stile anti-panic lockcase

CI/SfB		
31/59	Xt 7	
September 2007		

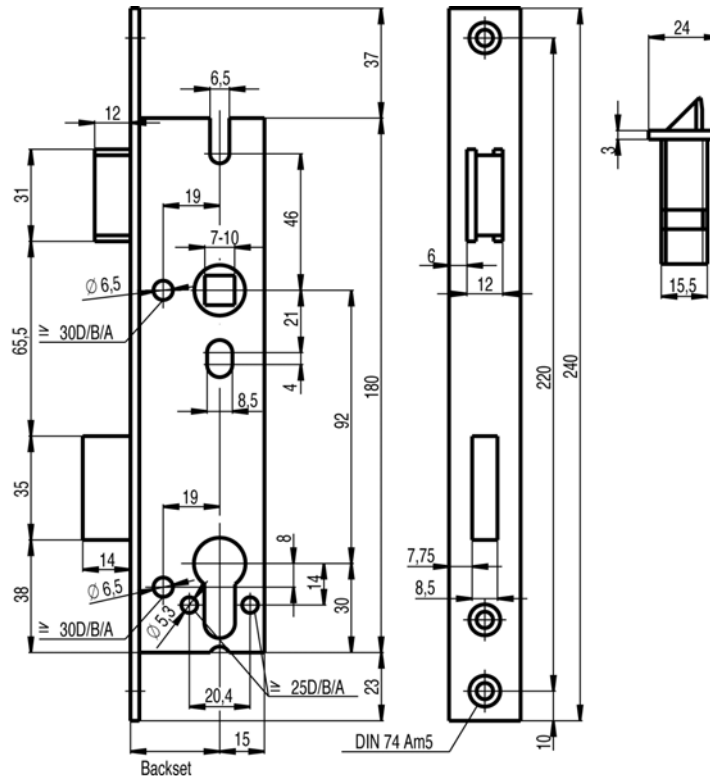

Narrow stile anti-panic lockcase to suit euro profile cylinders.

DE18405EP/30/216	anti-panic lockcase - 30mm backset - through follower - sqfe sat. stainless steel
DE18405EP/35/216	anti-panic lockcase - 35mm backset - through follower - sqfe sat. stainless steel
DE18405EP/40/216	anti-panic lockcase - 40mm backset - through follower - sqfe sat. stainless steel
DE18405EP/45/216	anti-panic lockcase - 45mm backset - through follower - sqfe sat. stainless steel

Forend: 24mm square end - stainless steel

Case: galvanised

Backset: **30 / 33 / 35 / 38 / 40 / 45mm**
(backsets shown in bold are standard stock lines - other backsets are available to special order)

Centres: profile cylinder: 92mm

Deadbolt: 14mm single throw, cast steel - nickel plated with anti-saw protection


Follower: 8mm heavy sprung to suit unsprung door furniture

Latchbolt: reversible, cast steel - nickel plated

Operation: lever operation retracts the latchbolt and deadbolt at all times

D&E 18419 narrow stile refurbishment lockcase

CI/SfB		
31/59	Xt 7	
September 2007		

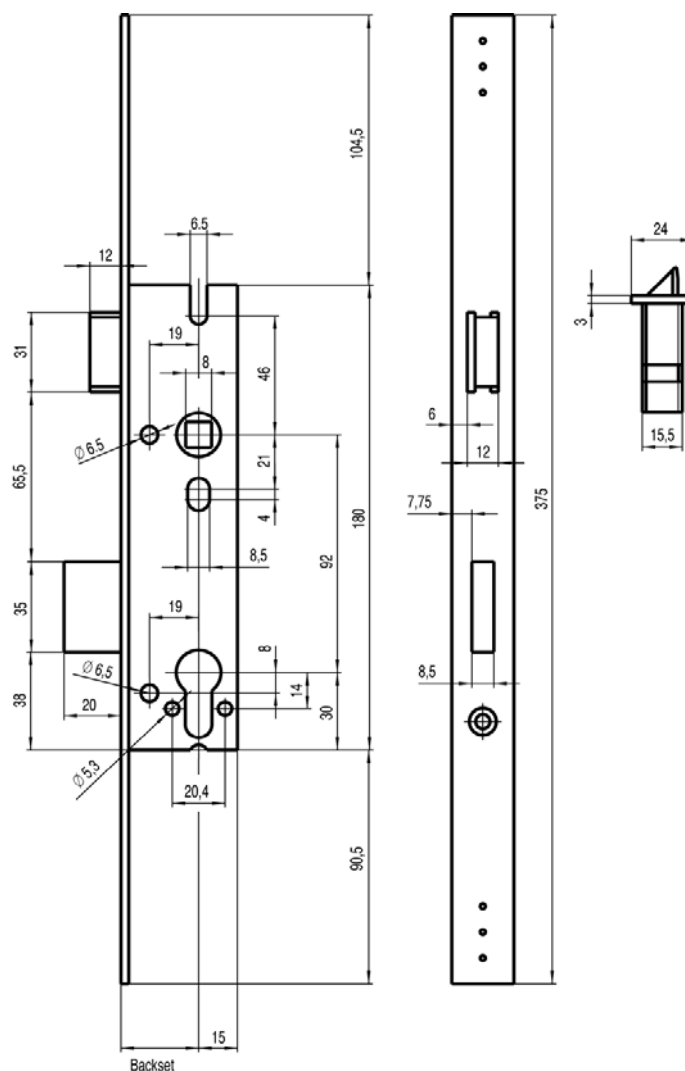

Narrow stile, reversible lockcase to suit euro profile cylinders. The extra long 375mm forend guarantees installation in 99.9% of repair or refurbishment applications.
This lock is locksmiths choice.

DE18419WO/30/216	'refurb' sashlock - 30mm backset - sqfe	sat. stainless steel
DE18419WO/35/216	'refurb' sashlock - 35mm backset - sqfe	sat. stainless steel
Forend:	24mm square end - stainless steel	
Case:	galvanised	
Centres:	profile cylinder:	92mm
Deadbolt:	20mm single throw, cast steel - nickel plated with anti-saw protection.	
Follower:	8mm heavy sprung to suit unsprung door furniture	
Latchbolt:	reversible, cast steel - nickel plated	

Sales: 01733 896123




K-1005

Fax: 01733 894466

E&OE

D&E 18417 series narrow stile roller lockcase

CI/SfB	31/59	Xt 7
September 2007		

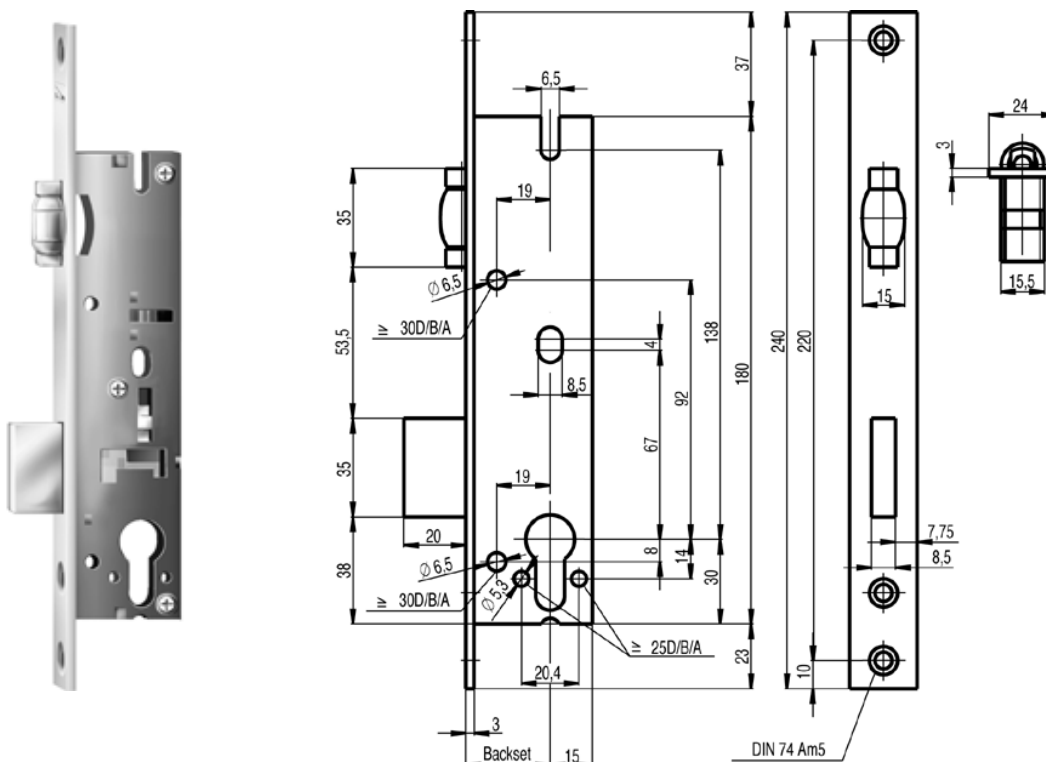

Heavy duty narrow stile roller bolt lockcase to suit euro profile cylinders.

DE18417WO/30/216	sashlock with roller latch - 30mm	
	backset - sqfe	sat. stainless steel
DE18417WO/30/235	sashlock with roller latch - 30mm	
	backset - sqfe	zinc plated
DE18417WO/35/216	sashlock with roller latch - 35mm	
	backset - sqfe	sat. stainless steel
DE18417WO/35/235	sashlock with roller latch - 35mm	
	backset - sqfe	zinc plated

Case: galvanised.


Backset: 25 / **30** / **35** / 40 / 45mm
(backsets shown in bold are standard stock lines - other backsets are available to special order)

Deadbolt: 20mm single throw, cast steel - nickel plated with anti-saw protection.

Latchbolt: roller latch

D&E 18400 series narrow stile deadlock case

CI/SfB		
31/59	Xt 7	
September 2007		

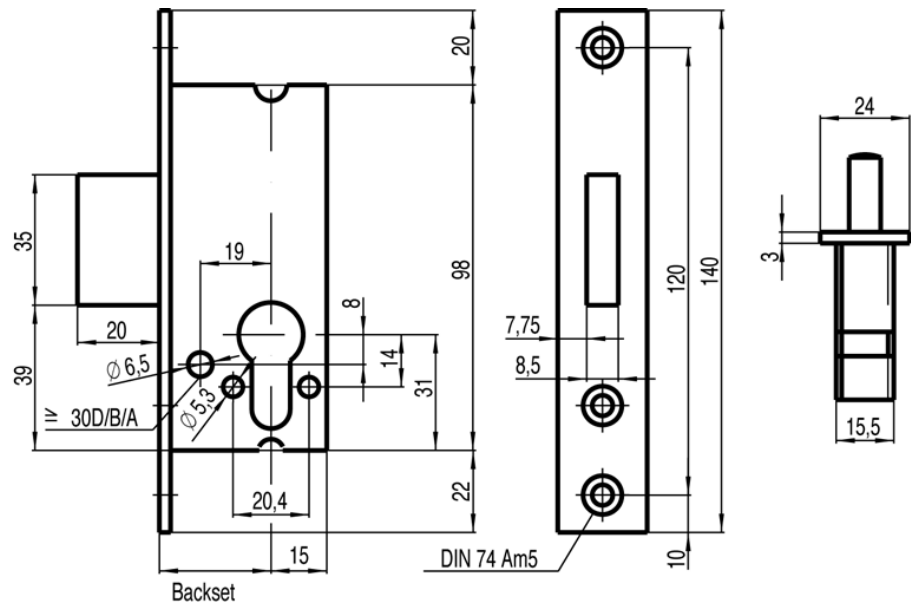

Heavy duty narrow stile deadlock case to suit euro profile cylinders.

DE18400/18/216
DE18400/18/235
DE18400/20/216
DE18400/20/235
DE18400/22/216
DE18400/22/235

deadlock - 18mm backset - sqfe sat. stainless steel
deadlock - 18mm backset - sqfe zinc plated
deadlock - 20mm backset - sqfe sat. stainless steel
deadlock - 20mm backset - sqfe zinc plated
deadlock - 22mm backset - sqfe sat. stainless steel
deadlock - 22mm backset - sqfe zinc plated

Case: galvanised.

Deadbolt: 14mm single throw, cast steel - nickel plated with anti-saw protection.

DE18410/30/216
DE18410/30/235
DE18410/35/216
DE18410/35/235
DE18410/40/216
DE18410/40/235
DE18410/45/216
DE18410/45/235

deadlock - 30mm backset - sqfe sat. stainless steel
deadlock - 30mm backset - sqfe zinc plated
deadlock - 35mm backset - sqfe sat. stainless steel
deadlock - 35mm backset - sqfe zinc plated
deadlock - 40mm backset - sqfe sat. stainless steel
deadlock - 40mm backset - sqfe zinc plated
deadlock - 45mm backset - sqfe sat. stainless steel
deadlock - 45mm backset - sqfe zinc plated


Case: galvanised.

Backset: 25 / 27 / **30** / 33 / **35** / 38 / **40** / **45mm**
(backsets shown in bold are standard stock lines - other backsets are available to special order)

Deadbolt: 20mm single throw, cast steel - nickel plated with anti-saw protection.

D&E 18412 narrow stile latchlock case

CI/SfB		
31/59	Xt 7	
September 2007		

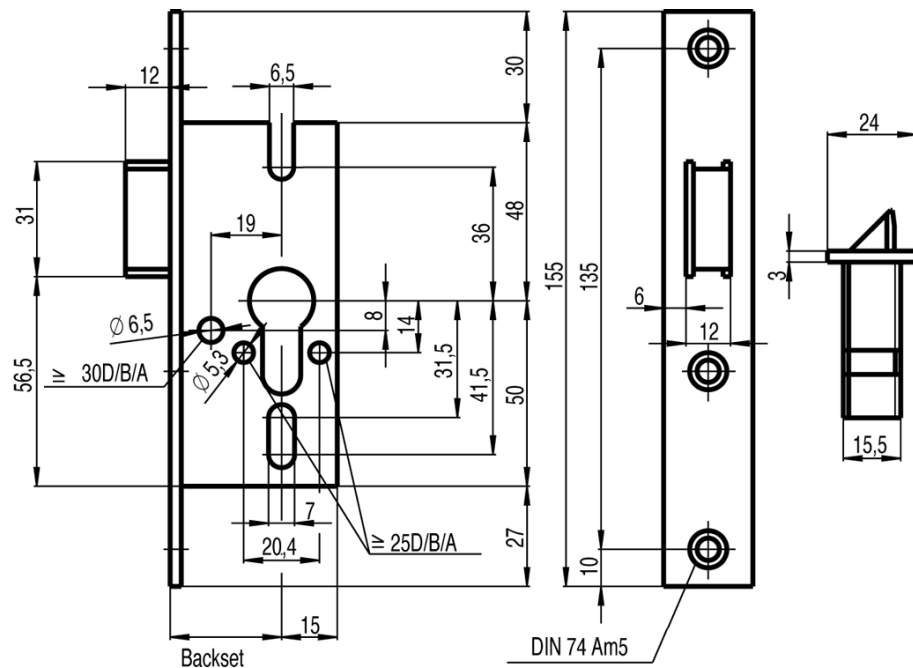

Narrow stile latchlock case to suit euro profile cylinders.

DE18412OO/18/235	nightlatch lockcase - 18mm backset - sqfe	zinc plated
DE18412OO/30/235	nightlatch lockcase - 30mm backset - sqfe	zinc plated
DE18412OO/35/235	nightlatch lockcase - 35mm backset - sqfe	zinc plated


Case: galvanised.

Backset: **18 / 20 / 22 / 25 / 27 / 30 / 35 / 40 / 45mm**
(backsets shown in bold are standard stock lines - other backsets are available to special order)

Latchbolt: reversible, cast steel - nickel plated.

D&E 13412 narrow stile latchlock case

CI/SfB		
31/59	Xt 7	
September 2007		

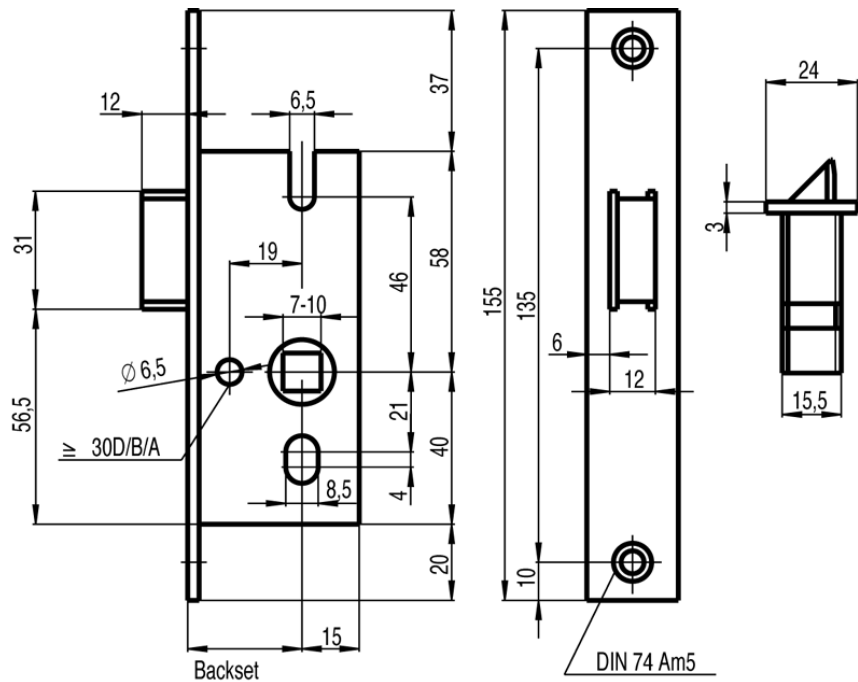

Narrow stile latchlock case.

DE13412OO/25/216	latchbolt lockcase - 25mm backset - sqfe	sat. stainless steel
DE13412OO/25/235	latchbolt lockcase - 25mm backset - sqfe	zinc plated
DE13412OO/30/216	latchbolt lockcase - 30mm backset - sqfe	sat. stainless steel
DE13412OO/30/235	latchbolt lockcase - 30mm backset - sqfe	zinc plated
DE13412OO/35/216	latchbolt lockcase - 35mm backset - sqfe	sat. stainless steel
DE13412OO/35/235	latchbolt lockcase - 35mm backset - sqfe	zinc plated

Case: galvanised.


Backset: 18 / 20 / 22 / **25** / 27 / **30** / **35** / 40 / 45mm
(backsets shown in bold are standard stock lines - other backsets are available to special order)

Follower: 8mm heavy sprung to suit unsprung door furniture

Latchbolt: reversible, cast steel - nickel plated.

D&E 18327 & 18328 sliding door locks

CI/SfB			
	31/59	Xt 7	
September 2007			

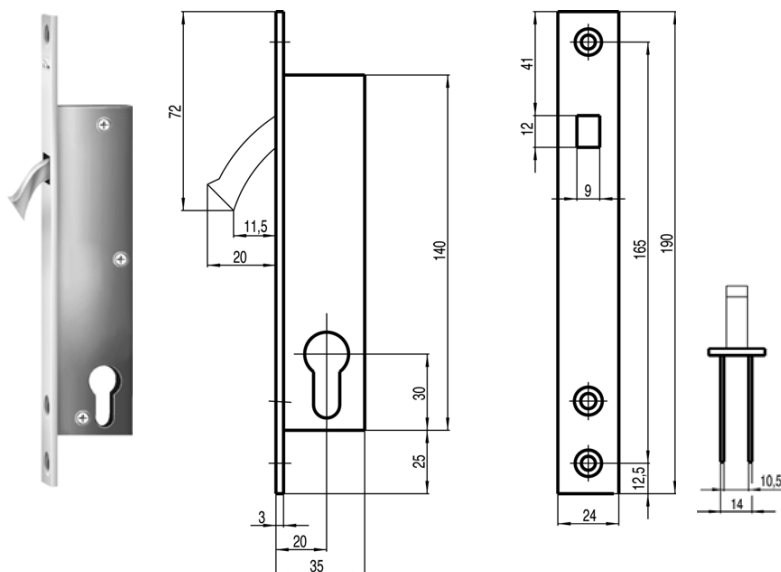


Heavy duty narrow stile hook bolt lockcase to suit euro profile cylinders.

DE18327OO/20/235

hook bolt lockcase - 20mm backset -
sqfe zinc plated

Case: galvanised

Hook bolt: 20mm single throw, cast steel - nickel plated

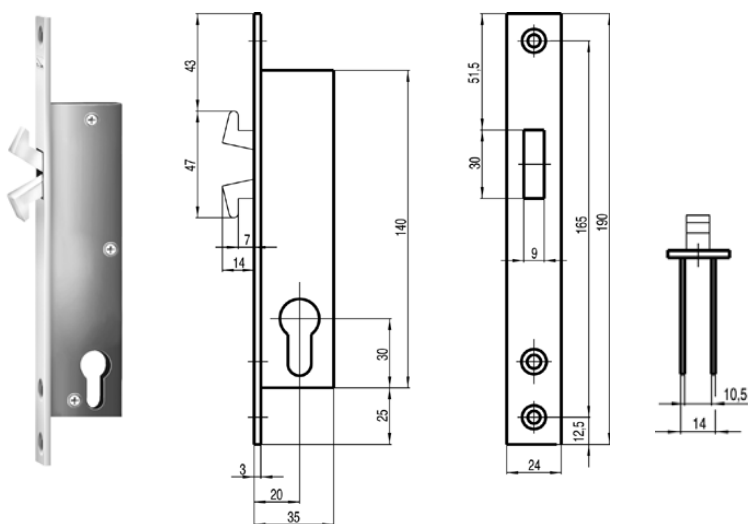

Heavy duty narrow stile hook bolt lockcase to suit euro profile cylinders.

DE18328OO/20/235

double hook bolt lockcase - 20mm
backset - sqfe zinc plated

Case: galvanised

Claw bolt: 14mm single throw, cast steel - nickel plated

D&E narrow stile lock strike plates

CI/SfB			
	31/59	Xt 7	
September 2007			

<u>Lockcase No.</u>	<u>Strike plate</u>		<u>Lockcase No.</u>	<u>Strike plate</u>	
DE13308	N/A		DE18405EP	1 843500	
DE13325	1 834400		DE18407	1 843500	
DE13420	1 834400			1 8435K0	▼
DE13412	1 844200			1 8435EA	▼
DE18302	N/A			1 8435E0	▼
DE18326	N/A				
DE18330	1844400				
DE18400	1843700		DE18410	1 843700	
			DE18412	1 844200	
DE18401	1 843500				
	1 8435K0	▼	DE18417	1 843800	
	1 8435EA	▼	DE18419	1 849000	
	1 8435E0	▼		1 843500	
				1 8435K0	▼
DE18405	1 843500			1 8435EA	▼
	1 8435K0	▼		1 8435E0	▼
	1 8435EA	▼			
	1 8435E0	▼			

Suitable for use with electric locks:

- ▼ Peso Models: 500 / 500A
- ▼ Eff-Eff Models: 17 / 19
- ▼ Eff-Eff Models: 12

CI/SfB			
	31/59	Xt 7	
September 2007			

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: 215
- Overall height: 202/224
- Top edge features:
 - Left corner: 10
 - Left side: 97.5
 - Right side: 55
 - Right corner: 10
- Internal features:
 - Two circular holes, each with a diameter of $\varnothing 12.4$ mm.
 - Two rectangular slots, each with a width of 13 mm.
 - Distance between the centers of the holes: 43.5
 - Distance between the centers of the slots: 55
 - Distance from the top edge to the center of the first hole: 97.5
 - Distance from the bottom edge to the center of the first hole: 23.5

Technical drawing of a rectangular plate. The overall dimensions are 240 mm in length and 61 mm in width. The plate has a central rectangular hole with a length of 49.4 mm and a width of 10.5 mm. There are four circular holes, each with a diameter of 10 mm, located at the corners. The distance between the centers of the top two holes is 52.75 mm, and the distance between the centers of the bottom two holes is 52.75 mm. The distance from the top edge to the center of the top-left hole is 10 mm, and the distance from the bottom edge to the center of the bottom-left hole is 10 mm. The distance from the left edge to the center of the leftmost hole is 20.24 mm. The plate is labeled with 'DIN 74 A7-5' and 'A7-5'.

Technical drawing of a shaft. The main view shows a shaft with a total length of 245. It has a central section with a diameter of 24 and a length of 120. The shaft is supported by bearings, with a bearing housing diameter of 42. The shaft has a diameter of 10.5 in the central section and 15 in the outer section. The shaft is shown in a cross-section view with dimensions E5.5, E10.4, and 60.


Technical drawing of a shaft with the following dimensions and labels:

- Overall length: 200
- Section 1: Length 10, Diameter 32.5
- Section 2: Length 90, Diameter 50, Label: DN 74 Am6
- Section 3: Length 90, Diameter 37.5
- Section 4: Length 10, Diameter 25
- Internal diameters: 15, 10.5, 24
- Shaft diameter: 3

Technical drawing of a mechanical part, likely a shaft or rod, showing dimensions and cross-sections. The main body has a diameter of 37.5. The left end has a diameter of 3 and a length of 30. The right end has a diameter of 24 and a length of 30. The central section has a diameter of 10.5 and a length of 13. The drawing includes cross-sections at the ends and a detailed view of the central section.

Technical drawing of a rectangular plate. The main drawing shows a plate with overall dimensions of 240 mm in length and 55 mm in width. The plate has two circular holes, each with a diameter of $\varnothing 10.74$ mm, spaced 10 mm apart from the ends. The distance between the centers of the holes is 133 mm. The plate has a thickness of 10 mm. A detail view shows a cross-section of the plate with a thickness of 9.8 mm and a width of 22.74 mm.

Right hand Left hand
(Din Standard)

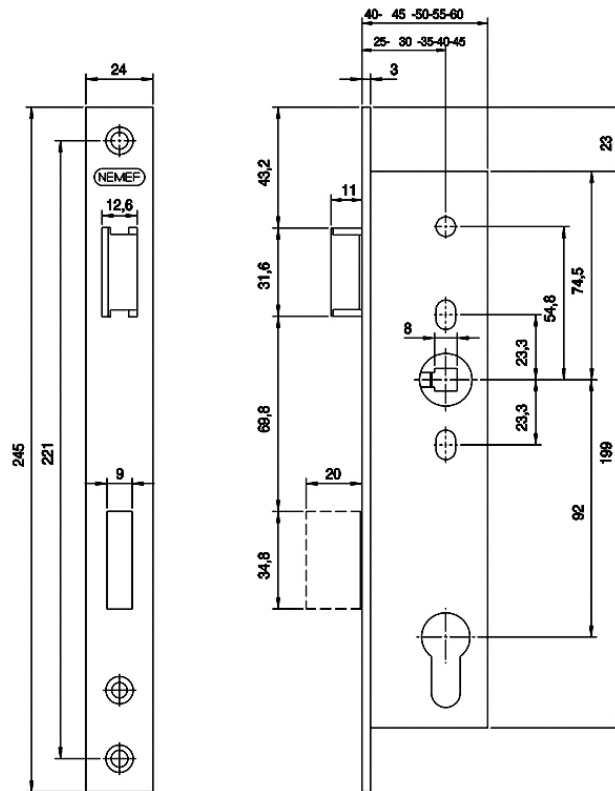

Heavy duty narrow stile reversible lockcase to suit euro profile cylinders.

DE9601/25/SS	sashlock - 25mm backset - sqfe	sat. stainless steel
DE9602/30/SS	sashlock - 30mm backset - sqfe	sat. stainless steel
DE9603/35/SS	sashlock - 35mm backset - sqfe	sat. stainless steel
DE9604/40/SS	sashlock - 40mm backset - sqfe	sat. stainless steel
DE9605/45/SS	sashlock - 45mm backset - sqfe	sat. stainless steel

Latchbolt:	reversible, cast steel - nickel plated
Deadbolt:	20mm single throw, cast steel - nickel plated
Case:	galvanised
Follower:	8mm heavy sprung to suit unsprung door furniture

D&E narrow stile sashlock



CI/SfB			
	31/59	Xt 7	
September 2007			



Heavy duty narrow stile reversible sashlock to suit euro profile cylinders.

DE9701/25/SS	sashlock - 25mm backset - sqfe	sat. stainless steel
DE9702/30/SS	sashlock - 30mm backset - sqfe	sat. stainless steel
DE9703/35/SS	sashlock - 35mm backset - sqfe	sat. stainless steel
DE9704/40/SS	sashlock - 40mm backset - sqfe	sat. stainless steel
DE9705/45/SS	sashlock - 45mm backset - sqfe	sat. stainless steel

Latchbolt:	reversible, cast steel - nickel plated	
Deadbolt:	20mm single throw, cast steel with steel security pins - nickel plated	
Case:	galvanised	
Follower:	8mm with pinch grip, heavy sprung to suit unsprung door furniture spring grip	
Centres:	profile cylinder:	92mm
Backset:	25 / 30 / 35 / 40 / 45 mm (backsets shown in bold are standard stock lines - other backsets are available to special order)	

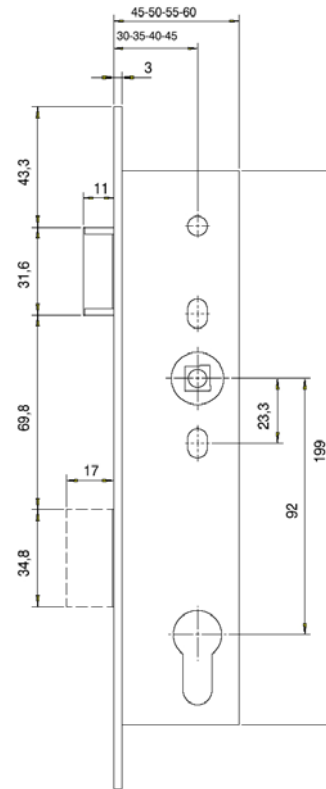

INSIDE



Fig. 1 - Left Hand - Open In

INSIDE



Fig. 2 - Right Hand - Open In

INSIDE



Fig. 3 - Left Hand - Open Out

INSIDE



Fig. 4 - Right Hand - Open Out

Heavy duty narrow stile reversible anti panic sashlock to suit euro profile cylinders.

DE9672/30/SS/1-3LH

DE9672/30/SS/2-4RH

DE9673/35/SS/1-3LH

DE9673/35/SS/2-4RH

DE9674/40/SS/1-3LH

DE9674/40/SS/2-4RH

DE9675/45/SS/1-3LH

DE9675/45/SS/2-4RH

DE9672/30/SS

DE9673/35/SS

DE9674/40/SS

DE9675/45/SS

anti-panic lockcase - 30mm backset -
split follower - fig. 1/3 - sqfe sat. stainless steel
anti-panic sashlock - 30mm backset -
split follower - fig. 2/4 - sqfe sat. stainless steel
anti-panic lockcase - 35mm backset -
split follower - fig. 1/3 - sqfe sat. stainless steel
anti-panic sashlock - 35mm backset -
split follower - fig. 2/4 - sqfe sat. stainless steel
anti-panic lockcase - 40mm backset -
split follower - fig. 1/3 - sqfe sat. stainless steel
anti-panic sashlock - 40mm backset -
split follower - fig. 2/4 - sqfe sat. stainless steel
anti-panic lockcase - 45mm backset -
split follower - fig. 1/3 - sqfe sat. stainless steel
anti-panic sashlock - 45mm backset -
split follower - fig. 2/4 - sqfe sat. stainless steel
anti-panic lockcase - 30mm backset -
1 pce follower - sqfe sat. stainless steel
anti-panic sashlock - 35mm backset -
1 pce follower - sqfe sat. stainless steel
anti-panic lockcase - 40mm backset -
1 pce follower - sqfe sat. stainless steel
anti-panic sashlock - 45mm backset -
1 pce follower - sqfe sat. stainless steel

Operation:

lever operation retracts the latchbolt and deadbolt from the relevant handed side at all times

Handings:

Fig 1: open in anti-clockwise close

Fig 2: open in clockwise close

Fig 3: open out anti-clockwise close

Fig 4: open out clockwise close

D&E narrow stile anti-panic sashlock

CI/SfB		
	31/59	Xt 7
September 2007		

Heavy duty narrow stile reversible anti panic sashlock to suit euro profile cylinders.

Latchbolt: reversible, cast steel - nickel plated

Deadbolt: 20mm single throw, cast steel - nickel plated

Case: galvanised

Follower: 8mm, heavy sprung to suit unsprung door furniture - through follower unless otherwise stated

Centres: profile cylinder: 92mm

Backset: **30 / 35 / 40 / 45mm**
(backsets shown in bold are standard stock lines - other backsets are available to special order)



INSIDE



Fig. 1 - Left Hand - Open In

INSIDE



Fig. 2 - Right Hand - Open In

INSIDE



Fig. 3 - Left Hand - Open Out

INSIDE



Fig. 4 - Right Hand - Open Out



Stichting Kwaliteit Gevelbouw

Nieuwe Kanaal 9F
6709 PA Wageningen

T : 0317 - 421720
F : 0317 - 421677

Postbus 362
6700 AJ Wageningen

E : info@skg.nl
I : www.skg.nl



EC-CERTIFICATE OF CONFORMITY

0960 - CPD - 427.008

In compliance with the Directive 89/106/EEC of the Council of European Communities of 21 December 1988 on the approximation of laws, regulations and administrative provisions of the Member States relating to the construction products (Construction Products Directive - CPD), amended by the Directive 93/68/EEC of the Council of European Communities of 22 July 1993, it has been stated that the construction product

Locks 9600 series

as specified in attached appendix (1 page)

produced and placed on the market by

NEMEF B.V.
Papegaaiweg 35
Wenum Wiesel

is submitted by the manufacturer to a factory production control (FPC) and the further testing of samples taken at the factory in accordance with a prescribed test plan and that the notified body - SKG - has performed the initial type-testing for the relevant characteristics of the product, the initial inspection of the factory and of the FPC and performs the continuous surveillance, assessment and approval of the FPC and an audit testing of samples taken at the factory, on the market or at the construction site. This certificate attests that all provisions concerning the attestation of conformity and the performances described in Annex ZA of the standard

EN 12209:2003

were applied and that the product fulfils all the prescribed requirements.

This certificate was first issued on 11 May 2007 and remains valid as long as the conditions laid down in the harmonised technical specification in reference or the manufacturing conditions in the factory or the FPC itself are not modified significantly.

Wageningen, 11 May 2007

ir. F.A. Zandstra
Manager

This Certificate has 1 page and 1 appendix (1 page)

Sales: 01733 896123




K-1016

Fax: 01733 894466

E&OE

D&E narrow stile roller latch sashlock

CI/SfB		
31/59	Xt 7	
August 2011		

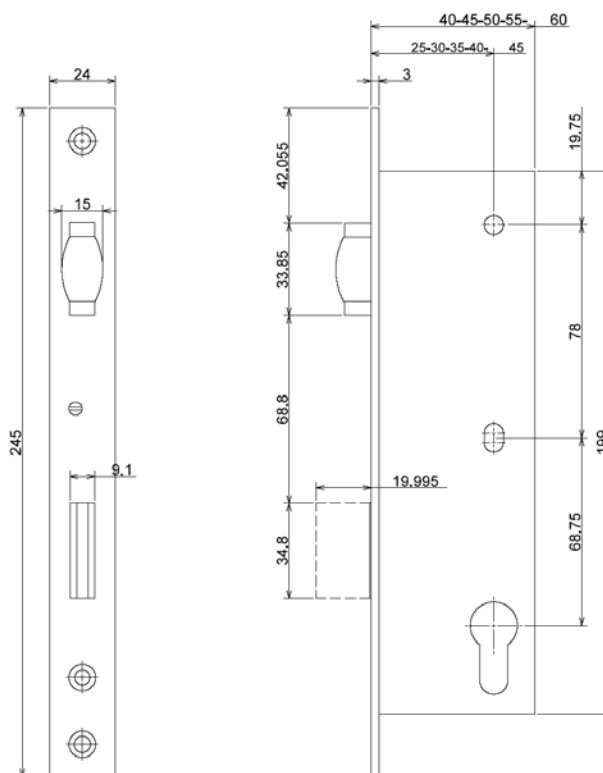

Heavy duty narrow stile reversible lockcase to suit euro profile cylinders.


DE9681/25/SS	roller sashlock - 25mm backset - sqfe	sat. stainless steel
DE9682/30/SS	roller sashlock - 30mm backset - sqfe	sat. stainless steel
DE9683/35/SS	roller sashlock - 35mm backset - sqfe	sat. stainless steel
DE9684/40/SS	roller sashlock - 40mm backset - sqfe	sat. stainless steel
DE9685/45/SS	roller sashlock - 45mm backset - sqfe	sat. stainless steel

Latchbolt: roller bolt, brass - nickel plated

Deadbolt: 20mm single throw, cast steel - nickel plated

Case: galvanised

Backset: 25 / **30** / **35** / **40** / **45**mm
(backsets shown in bold are standard stock lines - other backsets are available to special order)

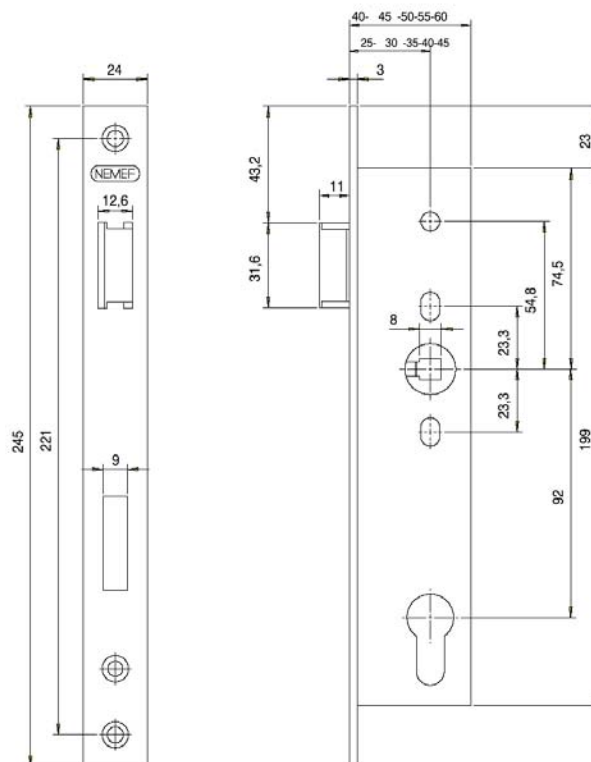

Heavy duty narrow stile reversible nightlatch lockcase to suit euro profile cylinders.

DE9631/25/SS	nightlatch - 25mm backset - sqfe	sat. stainless steel
DE9632/30/SS	nightlatch - 30mm backset - sqfe	sat. stainless steel
DE9633/35/SS	nightlatch - 35mm backset - sqfe	sat. stainless steel
DE9634/40/SS	nightlatch - 40mm backset - sqfe	sat. stainless steel
DE9635/45/SS	nightlatch - 45mm backset - sqfe	sat. stainless steel

Latchbolt: reversible, cast steel - nickel plated

Case: galvanised


Follower: 8mm heavy sprung to suit unsprung door furniture

Centres: profile cylinder: 92mm

Backset: 25 / **30** / **35** / **40** / **45**mm
(backsets shown in bold are standard stock lines - other backsets are available to special order)

D&E narrow stile latch lock

CI/SfB		
	31/59	Xt 7
August 2011		

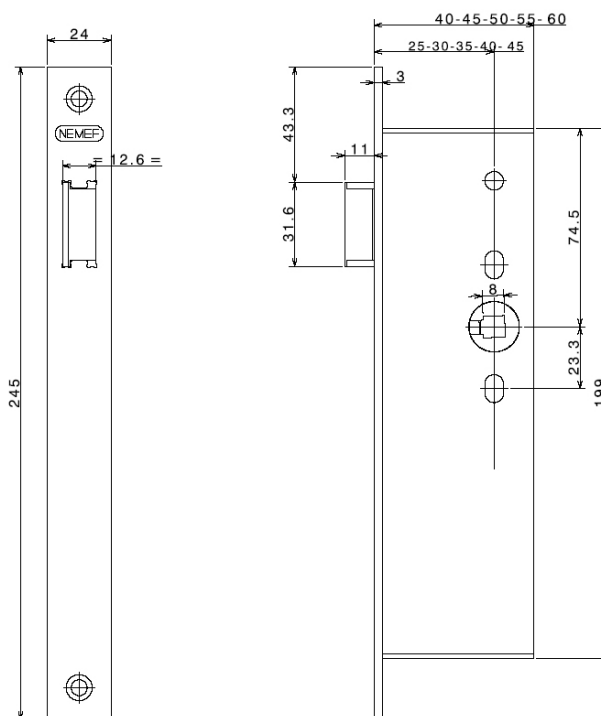



Heavy duty narrow stile reversible latch lock to suit euro profile cylinders.

DE9621/25/SS	latch lock - 25mm backset - sqfe	sat. stainless steel
DE9622/30/SS	latch lock - 30mm backset - sqfe	sat. stainless steel
DE9623/35/SS	latch lock - 35mm backset - sqfe	sat. stainless steel
DE9624/40/SS	latch lock - 40mm backset - sqfe	sat. stainless steel
DE9625/45/SS	latch lock - 45mm backset - sqfe	sat. stainless steel

Latchbolt: reversible, cast steel - nickel plated

Case: galvanised

Follower: 8mm heavy sprung to suit unsprung door furniture

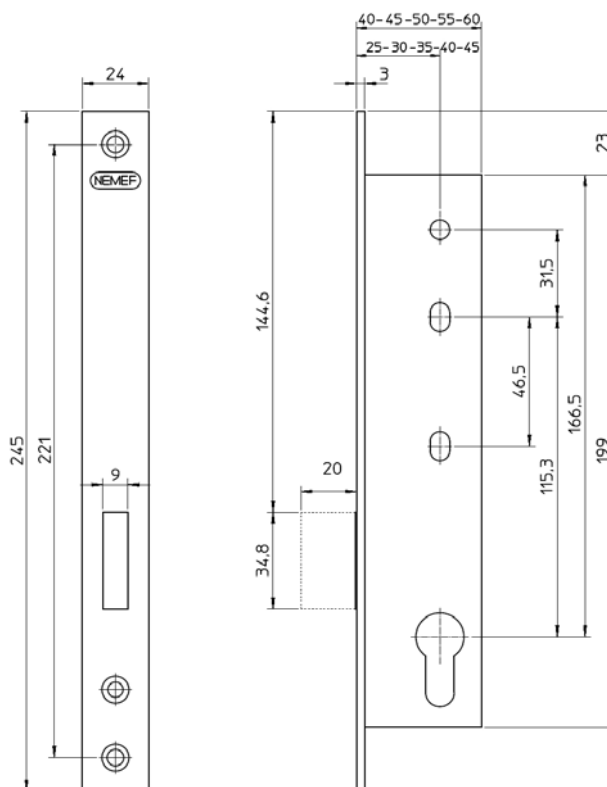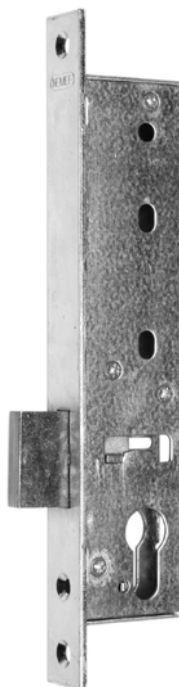

Heavy duty narrow stile deadlock to suit euro profile cylinders.

DE9651/25/SS	deadlock - 25mm backset - sqfe	sat. stainless steel
DE9652/30/SS	deadlock - 30mm backset - sqfe	sat. stainless steel
DE9653/35/SS	deadlock - 35mm backset - sqfe	sat. stainless steel
DE9654/40/SS	deadlock - 40mm backset - sqfe	sat. stainless steel
DE9655/45/SS	deadlock - 45mm backset - sqfe	sat. stainless steel

Deadbolt: 20mm single throw, cast steel - nickel plated

Case: galvanised


DE9751/25/SS	deadlock - 25mm backset - sqfe	sat. stainless steel
DE9752/30/SS	deadlock - 30mm backset - sqfe	sat. stainless steel
DE9753/35/SS	deadlock - 35mm backset - sqfe	sat. stainless steel
DE9754/40/SS	deadlock - 40mm backset - sqfe	sat. stainless steel
DE9755/45/SS	deadlock - 45mm backset - sqfe	sat. stainless steel

Deadbolt: 20mm single throw, cast steel with steel security pins - nickel plated

Case: galvanised

D&E narrow stile deadlock - small case

CI/SfB		
	31/59	Xt 7
August 2011		

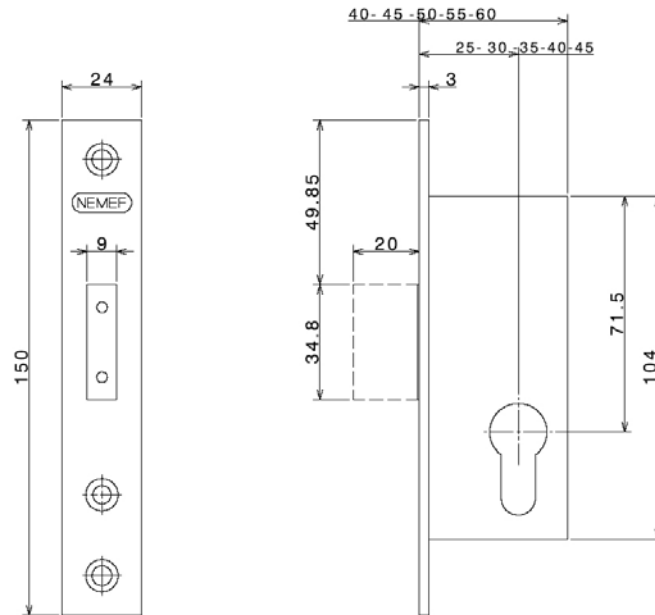

Heavy duty narrow stile small case deadlock to suit euro profile cylinders.

DE9641/25/SS	deadlock - 25mm backset - sqfe	sat. stainless steel
DE9642/30/SS	deadlock - 30mm backset - sqfe	sat. stainless steel
DE9643/35/SS	deadlock - 35mm backset - sqfe	sat. stainless steel
DE9644/40/SS	deadlock - 40mm backset - sqfe	sat. stainless steel
DE9645/45/SS	deadlock - 45mm backset - sqfe	sat. stainless steel

Deadbolt: 20mm single throw, cast steel - nickel plated

Case: galvanised



DE9741/25/SS	deadlock - 25mm backset - sqfe	sat. stainless steel
DE9742/30/SS	deadlock - 30mm backset - sqfe	sat. stainless steel
DE9743/35/SS	deadlock - 35mm backset - sqfe	sat. stainless steel
DE9744/40/SS	deadlock - 40mm backset - sqfe	sat. stainless steel
DE9745/45/SS	deadlock - 45mm backset - sqfe	sat. stainless steel

Deadbolt: 20mm single throw, cast steel with steel security pins - nickel plated

Case: galvanised

D&E narrow stile pivoting deadlock

CI/SfB		
31/59	Xt 7	
August 2011		

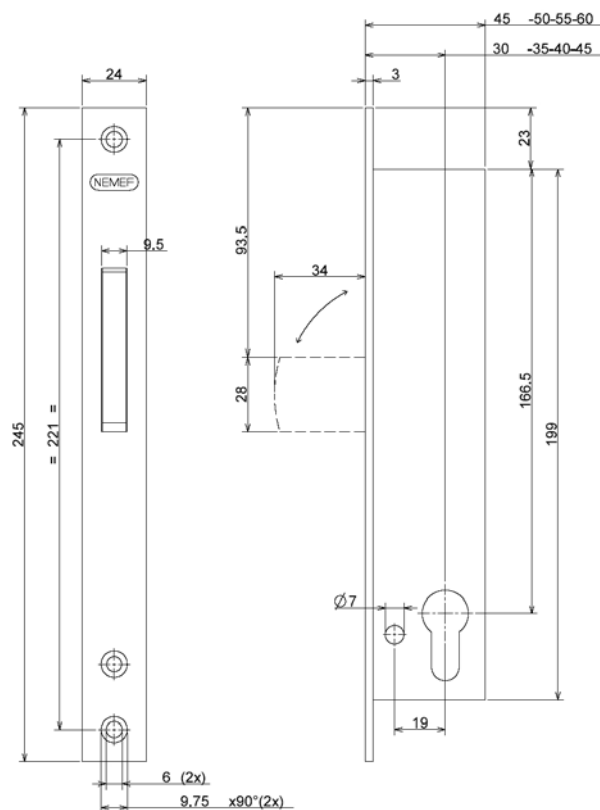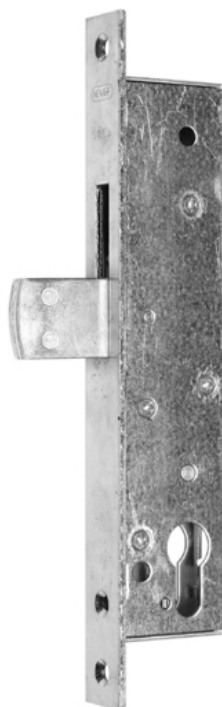

Heavy duty narrow stile deadlock with pivoting deadbolt to suit euro profile cylinders.


DE9662/30/SS	pivoting deadbolt - 30mm backset - sqfe	sat. stainless steel
DE9663/35/SS	pivoting deadbolt - 35mm backset - sqfe	sat. stainless steel
DE9664/40/SS	pivoting deadbolt - 40mm backset - sqfe	sat. stainless steel
DE9665/45/SS	pivoting deadbolt - 45mm backset - sqfe	sat. stainless steel

Deadbolt: 34mm single throw pivoting deadbolt, cast steel - nickel plated

Case: galvanised

D&E narrow stile pivoting hook lock

CI/SfB		
	31/59	Xt 7
August 2011		

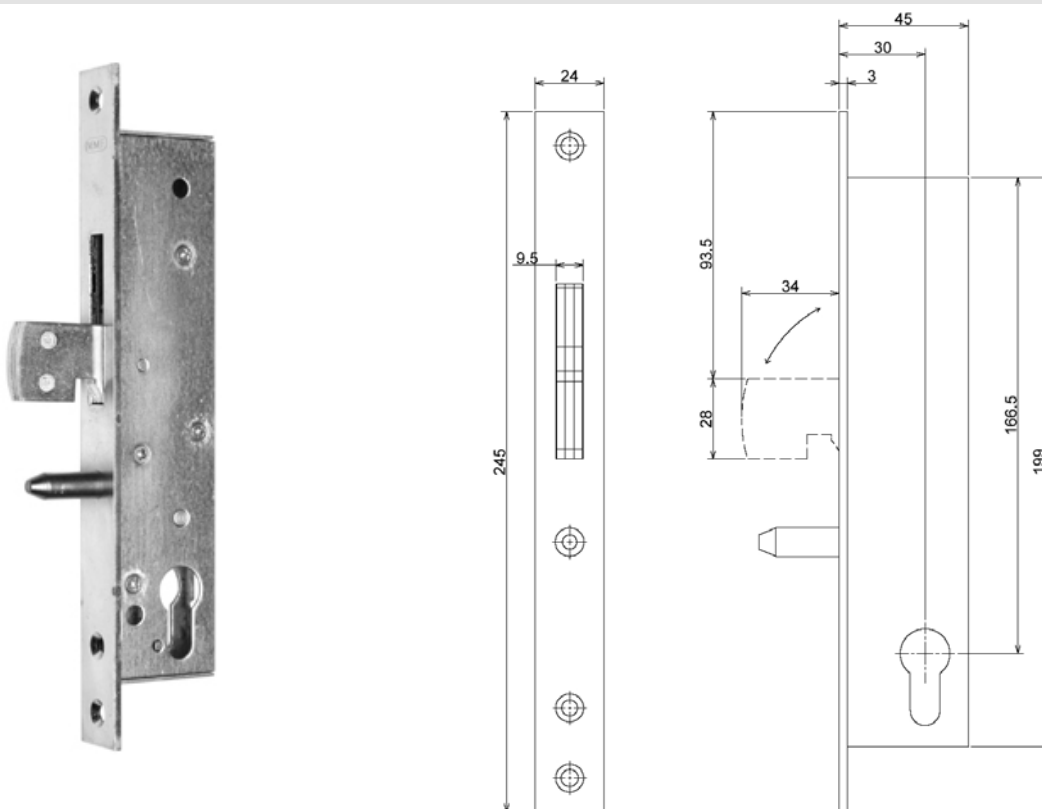

Heavy duty narrow stile hook bolt with pivoting deadbolt to suit euro profile cylinders.

DE9692/30/SS	pivoting deadbolt with security pin - 30mm	
	backset - sqfe	sat. stainless steel
DE9693/35/SS	pivoting deadbolt with security pin - 35mm	
	backset - sqfe	sat. stainless steel
DE9694/40/SS	pivoting deadbolt with security pin - 40mm	
	backset - sqfe	sat. stainless steel
DE9695/45/SS	pivoting deadbolt with security pin - 45mm	
	backset - sqfe	sat. stainless steel


Deadbolt: 34mm single throw pivoting hook bolt, cast steel - nickel plated

Case: galvanised


D&E narrow stile lock strike plates

CI/SfB	31/59	Xt 7
September 2007		


DEP9500/12 or DEP9600/17

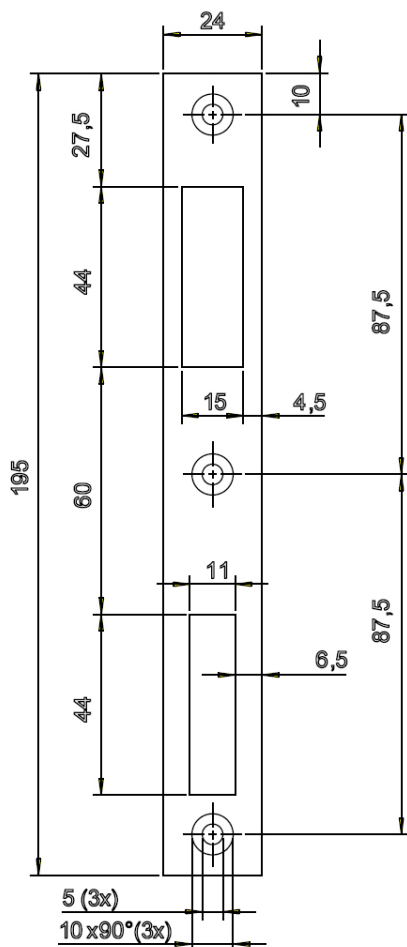


DEP1205/17

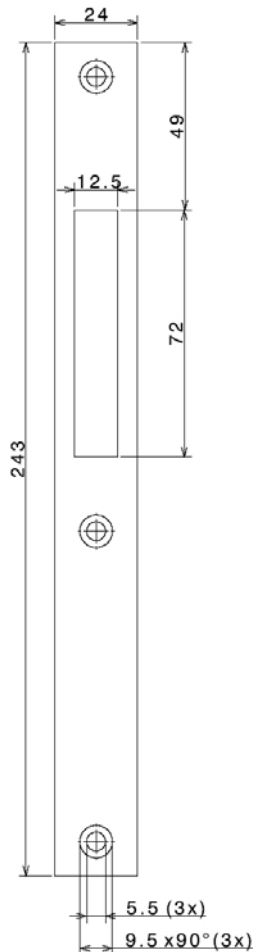


DEP1205H/17

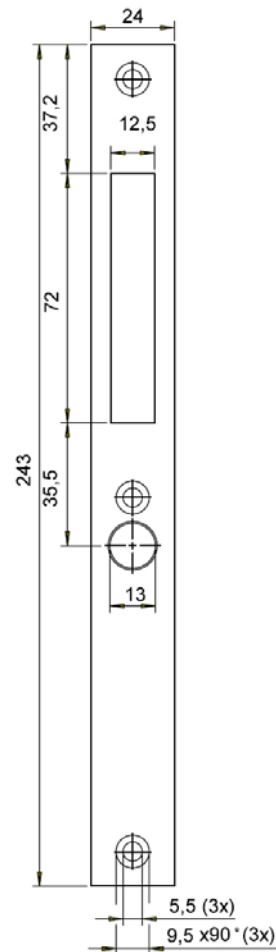

DEP635/12 or DEP635/17

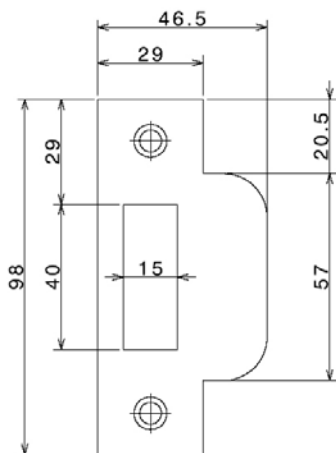

DEP636/12 or DEP636/17

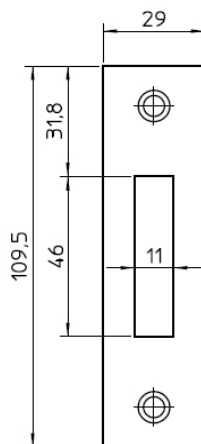

NOTE:- Rebate sets

13mm & 25mm rebate sets are available for the 240mm forends - supplied only in sat. stainless steel and are handed.

