

Pocket Door Pro

Professional sliding door solution for cavity walls with doors weighing up to 120kg




Pocket Door Pro offers a professional hardware system that allows doors to effortlessly slide into a cavity wall - perfect for saving space in homes, apartments, educational buildings, hospitals, hotels and office blocks.

The system has been designed to allow for easy installation with a high-quality aluminium cavity frame which comes with push together parts. The track has also been designed with an extension piece, allowing access to components within the track after installation for easy door removal.

Catering for doors weighing up to 120kg, Pocket Door Pro comes in 7 kit options to suit standard doors sizes. Kits can be cut to length to cater for non standard sizes. For bi-parting doors, two kits can be purchased.

The kit can be further enhanced with a timber liner kit for an aesthetic and professional finish, a dual soft close to prevent unwanted slamming and a simultaneous action kit for the movement of bi-parting doors.

This system is also available for FD30 rated fire doors, please view page 38.



Product Specification

Product Code	Max. Door Width	Max. Door Height	Door Thickness Range	Max. Door Weight	Finished Wall Thickness
PDKPROH1	610mm	1981mm	35 - 45mm	120kg	120mm or 125mm
PDKPROH2	686mm	1981mm	35 - 45mm	120kg	120mm or 125mm
PDKPROH3	762mm	1981mm	35 - 45mm	120kg	120mm or 125mm
PDKPROH4	838mm	1981mm	35 - 45mm	120kg	120mm or 125mm
PDKPROH6	826mm	2040mm	35 - 45mm	120kg	120mm or 125mm
PDKPROH7	726mm	2040mm	35 - 45mm	120kg	120mm or 125mm
PDKPROH10	930mm	2315mm	35 - 45mm	120kg	120mm or 125mm



Optional Liner Kit			
Product Code		Max. Door Thickness	Finished Wall Thickness
Single Doors	Bi-parting Doors		
LKH/120	BILKH/120	45mm	120mm
LKH/125	BILKH/125	45mm	125mm

Optional Dual Soft Close		
Product Code	Door Thickness Range	Door Weight Range
SOFTHP/60	600 - 950mm	10 - 60kg
SOFTHP/120	600 - 950mm	60 - 120kg
SOFTHP/WD	950 - 2500mm	20 - 120kg


Optional Accessories	
Component	Product Code
Simultaneous Action Kit For bi-parting pocket door applications. Move one door and the other will move simultaneously.	SIMHP120

Kit Contents		
Component	Quantity	Product Code
Aluminium Track	1	280HP/**AN
Aluminium Uprights	4	-
Hangers	2	284HP
Fixing Plate	4	-
Clip Stop	2	60IHP
Noggin	2 (x4 for PDKPROH10)	-
Floor Bracket	2 (x4 for PDKPROH10)	-
Guide	1	102N
Extension Piece	1	-
Spacer Plate	4	-

Product Diagrams

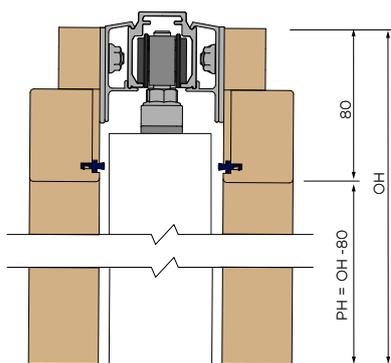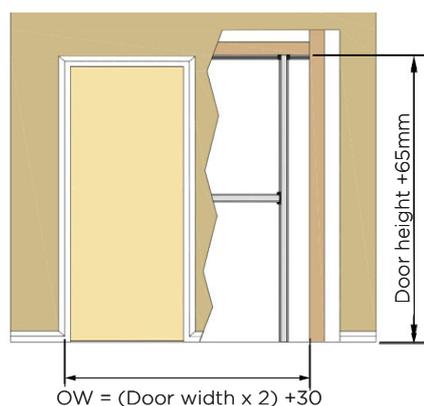

Key	
OW	Opening Width
PH	Passage Height
OH	Opening Height
PW	Passage Width
DW	Door Width
FWT	Finished Wall Thickness

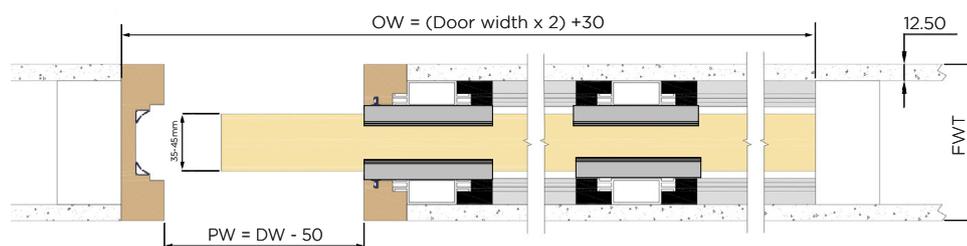

Opening Size Guide - Single Door

Product Code	Approximate Passage Size (H x W)	Cavity Thickness	Finished Wall Thickness
PDKPROH1	1966mm x 560mm	95mm or 100mm	120mm or 125mm
PDKPROH2	1966mm x 636mm	95mm or 100mm	120mm or 125mm
PDKPROH3	1966mm x 712mm	95mm or 100mm	120mm or 125mm
PDKPROH4	1966mm x 788mm	95mm or 100mm	120mm or 125mm
PDKPROH6	2025mm x 776mm	95mm or 100mm	120mm or 125mm
PDKPROH7	2025mm x 676mm	95mm or 100mm	120mm or 125mm
PDKPROH10	2300mm x 880mm	95mm or 100mm	120mm or 125mm